


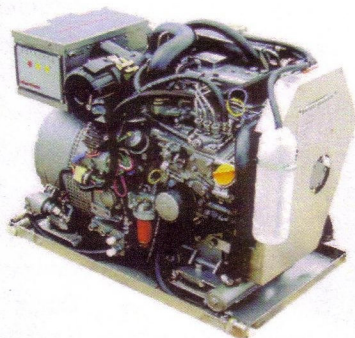

Marine Diesel Gensets

5.5-11 kW

Standard Features

- Stainless Steel Drip Pan
- Stainless Mounting Supports with Rubber Isolators
- Stainless Steel Belt Guard
- Freshwater Cooling/Heat Exchanger
- Water Cooled Exhaust Elbow
- Fuel Lines Plumbed to Stainless Connection Block
- Oil Change Hose Plumbed through Pan
- 12V Electric Fuel Pump
- Convenient Single Side Service Safeties:
 - Low Oil Pressure
 - High Coolant Temperature
 - High Exhaust Temperature

Standard Controls

(Generated Mounted)

- Circuit Breaker
- Hourmeter
- Genset Controller

Optional Equipment

- Plug-In Extension Wiring Harnesses (10', 20', 30', 50')
- Remote Instrument Panel
 - Start/Stop and Hourmeter
 - Four Gauge Panel
 - Oil Pressure
 - Coolant Temperature
 - A/C Volts
 - A/C Amps
- Deluxe Digital Controller
 - Measures all generator and engine parameters
- Auto Start
- Siphon Break
- Exhaust Kit
- Super Quiet Sound Shields

Specifications			
MODEL	MP5.5M	MP8M	MP11M
kW @ 60Hz	5.5	8	11
kW @ 50Hz	4	6	8
Engine (Yanmar)	3TNE68	3TNV76	3TNV82
Dimensions			
L inches (mm)	28 (711)	29 (737)	32 (813)
W inches (mm)	18 (457)		20 (508)
H inches (mm)	21.75 (552)	22 (559)	24.5 (622)
Weight(wet)lbs (kg)	410 (186)	458 (208)	572 (260)
Dimensions with Sound Enclosure			
L inches (mm)	30 (762)	32 (813)	36.5 (927)
W inches (mm)	21.75 (552)		22.75 (578)
H inches (mm)	24.5 (662)		26 (660)
Weight(wet)lbs (kg)	485 (220)	560 (255)	670 (305)
Aspiration	Natural		
CID (liters)	47.8 (784)	61.39 (1006)	81.22 (1331)
Speed			
RPM (60Hz)	1800		
RPM (50Hz)	1500		
No. of Cylinders	3		
Horsepower			
1800 RPM	10.1	12.9	17.7
1500 RPM	8.4	10.7	14.8
Battery Voltage	12V		
Fuel Consumption (GPH)			
100% Load	.56	.87	.95
75% Load	.46	.65	.73
Amperage (1 Phase)			
120/240V	41.7/20.83	66.7/33.33	83.33/41.67
Voltage Regulation	Electronic		
Voltage Regulation	+3%		
Frequency Regulation	+4%		